

TECHNICAL INFORMATION

SEGALEVEL SET Eko

A high migration power leveling agent for nylon and wool

- It regulates the pulling of PA dye and supports the pulling of dye the same color tones disperse.
- It is a strong migration material.
- It increases penetration of the fabric PA dye and ability of built-up.
- It provides correct dyeing by arranging the draft in PA fibers which draws at a very low temperature
- It is effective removal of the incorrect dyeing.

PROPERTIES



Component	Ethoxylated, based on the alcohol derivative mixture
Appearance	Yellowish liquid
Ionic character	Amfoterik
pH	6.5–8.5
Density	1.03 g/cm ³
Solubility	Can be diluted easily with cold and hot water

APPLICATION

Segalevet SET Eko can be added directly dye float. It should not be mixed directly with anionic products.

Recommended Amounts

PA and WO dye bath	1.0 – 3.0 g/L Segalevel SET Eko
PA and WO dye repair bath	2.0 – 6.0 g/L Segalevel SET Eko

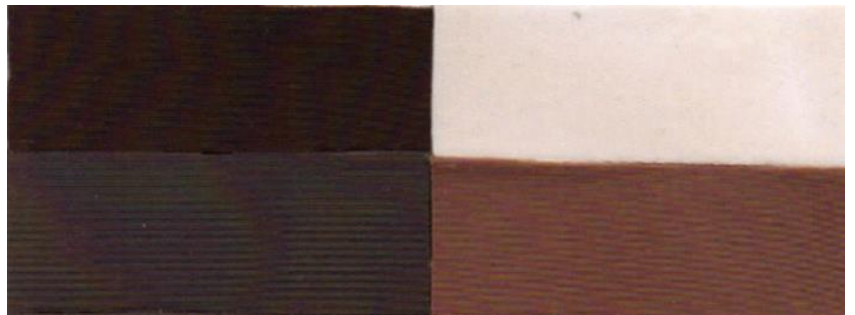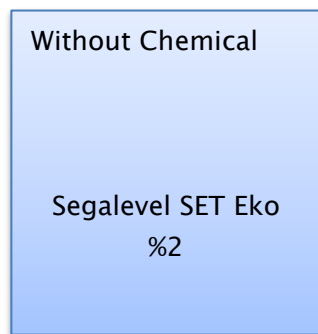

Storage : The storage life in original package at 0–40 °C is 12 months.

Paints, pigments, and most of the chemicals are patented by Sozal Ltd or its subsidiaries in various industrial countries. The information and recommendations presented here have been created with great care, but they may not include every possible situation. These information and recommendations are non-binding guidelines and must be adapted to the conditions in force. Moreover, no liability is accepted for the non-written application areas and methods. Information and protective measures that are required to be specified can be obtained from the Safety Data Sheet.