

Sodecron Black XF-CT

An economical black disperse dye , that exhibits better fastness profile.

Suitability / Application:

Substrate:

Fiber / Yarn	-	●
Sewing threads	-	●
Piece dyeing	-	●
Micro fibers / fabric	-	●
P/C Blends - Exhaust, 2 bath	-	●
P/C Blends - Continuous	-	●
P/Elastane Blends	-	●
P/W Blends	-	○

Process:

Exhaust dyeing:

Low temperature with carrier	-	○
HT, 130°C	-	●
HT, Alkaline dyeing	-	○

Continuous dyeing



Printing	-	●
----------	---	---

Development method in printing:

Pressure Steaming	-	●
HT Loop Steaming	-	●
Discharge printing	-	■

Exhaust Dyeing

0.850%



(Dyeing at 130°C for 45 min on polyester fabric at pH 4 adjusted with Levocol 43

General properties:

C.T.Z.:	-	100 - 130°C
Leveling at 130°C:	-	Moderate
Migration:	-	Moderate
Recommended pH with buffer system :	-	4.0
Recommended auxiliary:	-	Levocol OA, 3 - 4 g/l
Dischargeability:(Zinc sulphoxylate formaldehyde)	-	Moderate
Sensitivity to metal (Fe)	-	Low
Stripping method	-	Reductive
Saturation value in HTHP exhaust dyeing (On 80D/36F polyester knit fabric)	-	5.00%

Continuous dyeing

45 g/l on P/C cloth



(67/33 Blend)

Shade change under artificial light:

D 65	Inc A	F 11 (TL 84)	F02 (CWF)	UL 35
Control	R	Tr B	Tr B	Tr B


Cross staining on other components of blends in one bath dyeing:

Substrate	CA	PAN	PA	Cellulosic	Wool
Staining in dyebath	High	Moderate	High	Low	Moderate
Staining after R.C.	High	Moderate	High	Low	Low


(Abbreviation: ● - Suitable, ○ - Not Suitable, O - Limited suitability, ■ - Not Recommended, R - Redder, G - Greener,
Y - Yellower, B - Bluer)

Sodecron Black XF-CT

Product Performance:

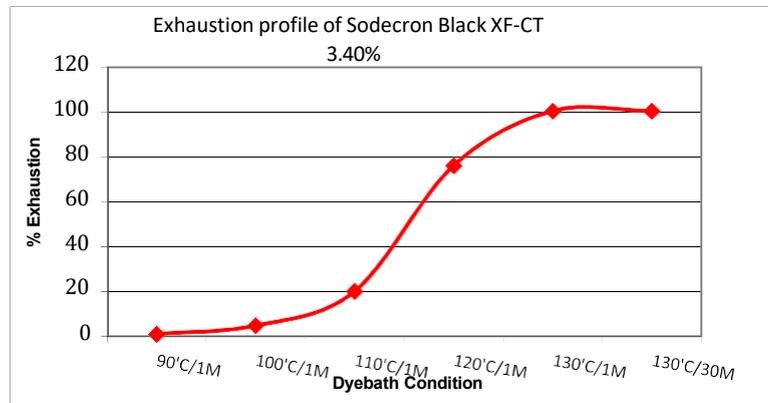

(Dyeing at different dye bath temperature on polyester fabric at pH 4 adjusted with Levocol 4398)

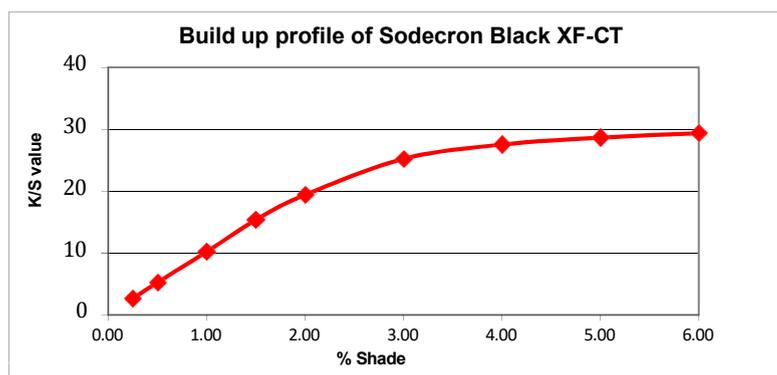



(Exhaust dyeing different depth at 130°C temperature for 45 min on polyester fabric at pH 4 adjusted with Levocol 4398)

Thermosol Application: (Pad - Dry - Thermosol)

45.0 gpl Sodecron Black XF-CT on P/C fabric

pH Sensitivity:

3.40% Sodecron Black XF-CT in exhaust dyeing

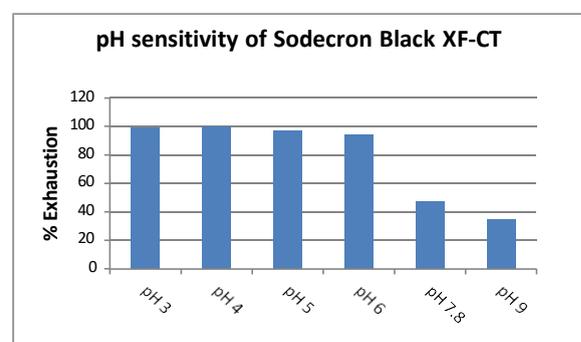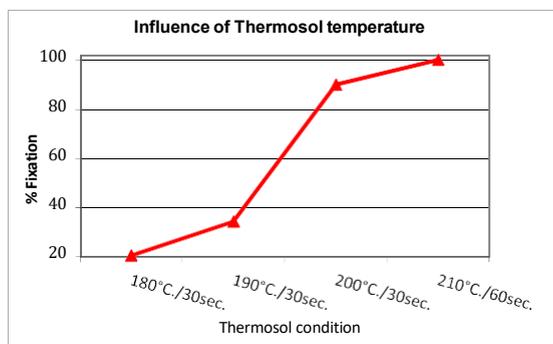

Fastness Properties: (Tested on 80D/36F 100% PET Knit, dyed by exhaust method)

- Light fastness (ISO 105 B02)
- Light fastness (AATCC 16, Option 3, 20 AFU)
- Sublimation fastness 2/1 SD (ISO 105 P01)

Shade change (Rating)		
1/6 SD	1/3 SD	2/1 SD
5	5	5-6
4.0	4.0	4.0

Temperature	180°C	190°C	200°C
C.O.S.	4-5	4-5	4-5
Staining on PET	4	3-4	3

Sodecron Black XF-CT

Fastness Properties: (Tested at 3.40% depth, on 80D/36F 100% PET Knit dyed by exhaust method and post set at 180°C for 30 Sec)

		Staining on						
		C.O.S.	Acetate	Cotton	Nylon	Polyester	Acrylic	Wool
● Perspiration Light fastness (ISO 105 B07)	Acid	4						
● Perspiration Light fastness (ISO 105 B07)	Alkaline	4						
● Wash fastness (ISO 105 C10 C, 60°C)		4	4	3-4	4	4-5	4-5	4-5
● Wash fastness (ISO 105 C06, C2S)		4	4	3-4	3-4	4	4-5	4
● Wash fastness (AATCC 61 Option 2A,49°C)		4.0	4.0	3.5	3.0	4.0	4.5	4.0
● M&S C4A, 60°C		4	4	3-4	3-4	4	4-5	4
● Adidas Wash fastness, 60°C		4	3-4	4	4	4-5	4-5	4-5
● Dry cleaning fastness (ISO 105 D01)		4	4-5	4-5	4-5	4-5	4-5	4-5
● Water fastness (ISO 105 E01)		4-5	3-4	4	3	4	4-5	4
● Sea water fastness (ISO 105 E02)		4-5	4-5	4-5	4	4-5	4-5	4-5
● Chlorinated water fastness,(Adidas 5.06, 50 ppm)		4						
● Perspiration fastness (ISO 105 E04,Acid)		4-5	4	3-4	3	4	4	4
● Perspiration fastness (ISO 105 E04,Alkaline)		4-5	4	4	3-4	4	4-5	4
● Burnt gas fumes fastness (ISO 105 G02, 3 cycles)		4						
● Hypochlorite bleach fastness (ISO 105 N01)		4						
● Peroxide bleach fastness (ISO 105 N02)		4		4		4		
● Mercerization fastness (ISO 105 X04)		4		4-5				
● PVC migration (ISO 105 X10)		3-4	(Staining on PVC foil)					
● Crocking Fastness (ISO 105 X12, Dry/Wet)			4-5/4-5					
● Migration during storage (AATCC TM 163)		4.0	4.5	4.5	4.5	4.5	4.5	4.5
● Saliva fastness (DIN 53160)		5.0	(Staining on filter paper)					

Fastness Properties: (Tested at 6.00% depth, on 100% micro PET Knit (0.5 dpf) dyed by exhaust method and post set at 180°C for 30 Sec)

	Staining on						
	C.O.S.	Acetate	Cotton	Nylon	Polyester	Acrylic	Wool
● Light fastness (ISO 105 B02)	5-6						
● Wash fastness (ISO 105 C06, C2S)	4	3	3-4	3	3-4	4	4
● Wash fastness (AATCC 61 Option 2A,49°C)	4.0	3.5	3.5	3.0	3.5	4.5	4.0
● Water fastness (ISO 105 E01)	4-5	3-4	3-4	3	3-4	4	3-4
● Crocking Fastness (ISO 105 X12, Dry/Wet)			4/4				

Fastness Properties: (Tested at 45.0 g/l depth, on P/C (67/33) blend twill fabric by continuous dyeing method and post set at 180°C for 30 Sec)

	Staining on						
	C.O.S.	Acetate	Cotton	Nylon	Polyester	Acrylic	Wool
● Wash fastness (ISO 105 C06, C2S)	4	4	4	4	4	4-5	4-5
● Wash fastness (AATCC 61 Option 2A,49°C)	4.0	4.0	4.0	4.0	4.0	4.5	4.5
● Water fastness (ISO 105 E01)	4-5	4	4	4	4	4-5	4-5
● Crocking Fastness (ISO 105 X12, Dry/Wet)			4-5/4-5				

Note:

Disclaimer: This information is provided in good faith, to the best of our knowledge and without liabilities.