

Segenol Sky Blue GN



- Highest tintorial brilliant blue with high build -up
- Good alteration to Reactive Blue -19 based product.
- For more bright green and purple shade requirement.

Application method:

Exhaust dyeing:

Dyeing Temperature	60°C
--------------------	------

Continuous dyeing

Cold Pad Batch	S
Pad-Dry-Pad-Steam	S
E-Control	S
Pad Steam	L.S
Pad-Dry-Thermofix	L.S

General properties:

Dischargeability:	ND	
Solubility neutral (gpl) :	100 gpl	
Solubility with 50g/l G. Salt at 50°C :	80 gpl	
Alkali Stability	ASS	Stable
	PLS	Stable
Substantivity	Medium	
Fixation Value	81.41%	
Reactivity	High	

Remarks:-

(Abbreviation: S-Suitable, NS - Not Suitable,

ASS - Alkali + Salt + Stability

PLS - Pad Liquor Stability.

R - Redder,

G - Greener,

RR- Much Redder

L.S -Limited Suitability.

Exhaust Dyeing on 100% Cotton
interlock knit fabric

1.15%(1/2)



2.30%(1/1)



4.60%(2/1)



Cold pad-batch on
mercerised cotton Poplin

23. g/l



46.g/l



92. g/l




NOTE:-

We suggest to use this product for Royal Blue shades above 1% in the recipe as a self product to avoid any reproducibility issue.

Fastness Properties:

Light fastness	1/1.	1/6.					
● Light fastness (ISO 105 B02)- Upto grade 6	6+	6					
● Light fastness (AATCC 16, Option 3) 20 AFU	4--5	4					
● Light fastness (AATCC 16, Option 3) 40 AFU	4--5	4					
● Perspiration light fastness (acidic) (Nike Method)	NA	NA					
● Perspiration light fastness (alkaline)(Nike Method)	4--5	NA					
Wash &Wet fastness properties	CS	CA	CO	PA	PES	PAN	WO
● Wash fastness (ISO 105 C06, C2S,)	4	4--5	4--5	4--5	4--5	4--5	4--5
● Wash fastness (ISO 105 C10 C3, 60°C)	4	4--5	4	4--5	4--5	4--5	4--5
● Wash fastness (AATCC 61 Option 2A,49°C)	4	4.5	4.5	4.5	4.5	4.5	4.5
● Water severeM&S,C6	4--5	4--5	4--5	4--5	4--5	4--5	4--5
● Drycleaning M&S,C-5	4--5	4--5	4--5	4--5	4--5	4--5	4--5
● Fastness to Oxidative bleach M&S C-10A	3--4 On tone						
● Perspiration fastness (M&S C7,Acid)	4--5	4--5	4--5	4--5	4--5	4--5	4--5
● Perspiration fastness (M&S C7,Alkaline)	4--5	4--5	4--5	4--5	4--5	4--5	4--5
● Fastness to Chlorinated water (ISO 105 E03) (20 ppm)	4						
● Fastness to Hot pressing ISO 105 X-11-T (immediate ,Wet/Dry)	4/4--5						
● Fastness to Hot pressing ISO 105 X-11-T (after 4hrs,Wet/Dry)	4--5/4--5		4--5				
● Fastness to Burnt gas fumes (ISO 105 G02:1993,1 cycles)	4						
● Crocking Fastness (ISO 105 X12, Dry/Wet)	4--5/3--4						
● Hypochlorite bleaching ISO 105 N01 : 1993	4--5						
● Fastness to Peroxide bleaching ISO 105 N02:1993	3						
● Shade change after Resin finish.	Tr.Greener.						

- **Build up property** (Cotton Knits Interlock Un-mercerised bleached fabric)

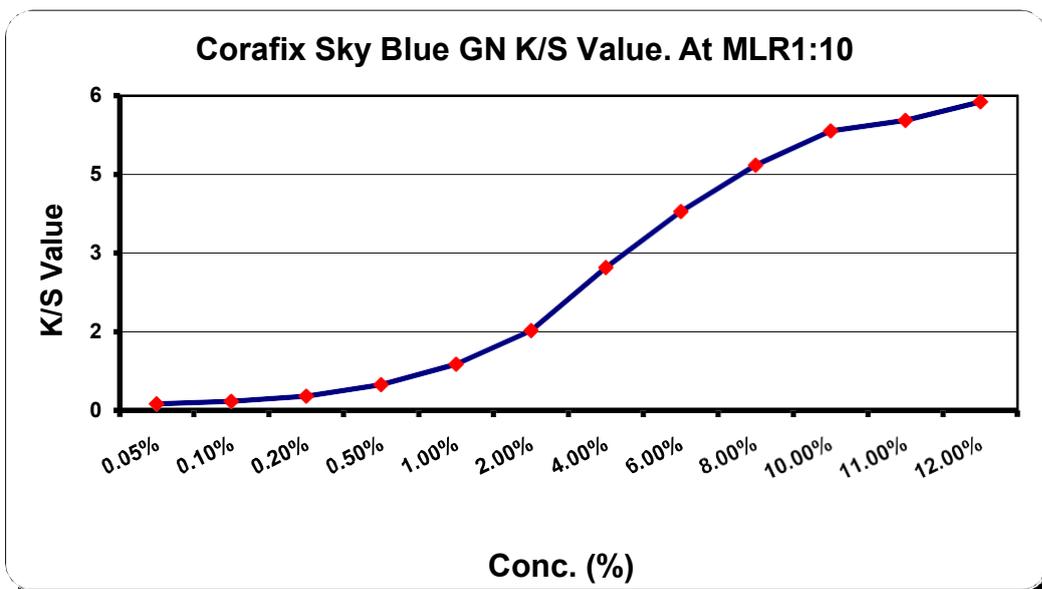


% Stripping with recommended Recipe :


Stripping Method :

Caustic Soda 32.5%	10.-15	ml/l
Hydrosuphite Conc	5	g/l

Heat from 60°C to 90°C in 15 min. hold for 30 min. at 90°C, then rinse neutralisation with Acidic acid (pH 5.5) at Room Temp followed by warm and cold wash

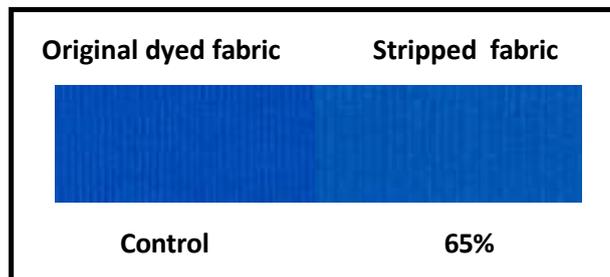

Cross staining on other components of blends in one bath dyeing :

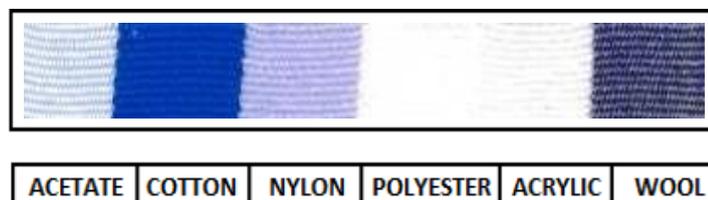

(This information provided is in good faith, to the best of our knowledge and without liabilities)