

Segenol Carmine X-RFT



- Brilliant Reactive Carmine with good wash -fastness
- Suitable in trichromy Component with Yellow X-RFT& Red X-RFT
- Dischargeable

Substrate Suitability

Cotton	S
Viscose	S
Polyester / Cotton Blend	S
Polyester / Viscose Blend	S
Cotton / Elastane Blends	S

Application method:

Exhaust dyeing:

	Dyeing Temperature	60°C
--	--------------------	------

Continuous dyeing

	Cold Pad Batch	S
	Pad-Dry-Pad-Steam	S
	E-Control	S
	Pad Steam	S
	Pad-Dry-Thermofix	L.S

General properties:

Dischargeability:	D	
Solubility neutral (gpl) :	150 gpl	
Solubility with 50g/l G. Salt at 50°C :	70 gpl	
Alkali Stability	ASS	Stable
	PLS	Stable
Substantivity	Medium	
Fixation Value	84.73%	
Reactivity	Medium	

Remarks:-

(Abbreviation: S-Suitable, NS - Not Suitable,

ASS - Alkali + Salt + Stability

PLS - Pad Liquor Stability.

R - Redder,

G - Greener,

RR- Much Redder

L.S - Limited Suitability

Exhaust Dyeing on 100% Cotton
interlock knit fabric

0.6%(1/2)



1.2%(1/1)



2.4%(2/1)



Cold pad-batch on
mercerised cotton poplin

6.0 g/l



12 g/l




24 g/l

Fastness Properties:

Light fastness	1/1.	1/6.					
● Light fastness (ISO 105 B02)- Upto grade 6	4	3					
● Light fastness (AATCC 16, Option 3) 20 AFU	4--5	3--4					
● Light fastness (AATCC 16, Option 3) 40 AFU	4	2--3					
● Perspiration light fastness (acidic) (Nike Method)	4.5	3					
● Perspiration light fastness (alkaline)(Nike Method)	4.5	3					
Wash &Wet fastness properties	CS	CA	CO	PA	PES	PAN	WO
● Wash fastness (ISO 105 C06, C2S,)	4	4--5	4--5	4--5	4--5	4--5	4--5
● Wash fastness (ISO 105 C10 C3, 60°C)	4	4--5	4--5	4--5	4--5	4--5	4--5
● Wash fastness (AATCC 61 Option 2A,49°C)	4	4--5	4--5	4--5	4--5	4--5	4--5
● Water severeM&S,C6	4--5	4--5	4--5	4--5	4--5	4--5	4--5
● Drycleaning M&S,C-5	4	4--5	4--5	4--5	4--5	4--5	4--5
● Fastness to Oxidative bleach M&S C-10A	3--4 Off tone						
● Perspiration fastness (M&S C7,Acid)	4--5	4--5	4--5	4--5	4--5	4--5	4--5
● Perspiration fastness (M&S C7,Alkaline)	4--5	4--5	4--5	4--5	4--5	4--5	4--5
● Fastness to Chlorinated water (ISO 105 E03) (20 ppm)	4						
● Fastness to Hot pressing ISO 105 X-11-T (immediate)	4--5/4--5						
● Fastness to Hot pressing ISO 105 X-11-T (after 4hrs)	4--5/4--5		4--5				
● Fastness to Burnt gas fumes (ISO 105 G02:1993) (1 &3 cycles)							
● Crocking Fastness (ISO 105 X12, Dry/Wet)	4/3.						
● Hypochlorite bleaching ISO 105 N01 : 1993	4						
● Fastness to Peroxide bleaching ISO 105 N02:1993	4						
● Shadechange after Resin finish.	Redder yellower.						

● Build up property (Cotton Knits Interlock

Un-mercerised bleached fabric)

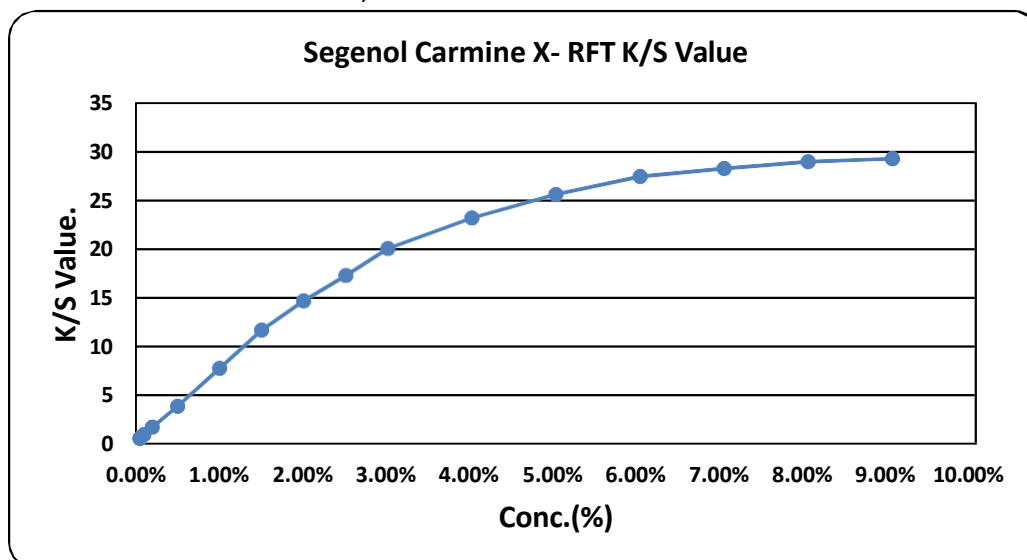


% Stripping with recommended Recipe :


Stripping Method :

Caustic Soda 32.5%	10.-15	ml/l
Hydrosuphite Conc	5	g/l

Heat from 60°C to 90°C in 15 min. hold for 30 min. at 90°C, then rinse neutralisation with Acidic acid (pH 5.5) at Room Temp followed by warm and cold wash

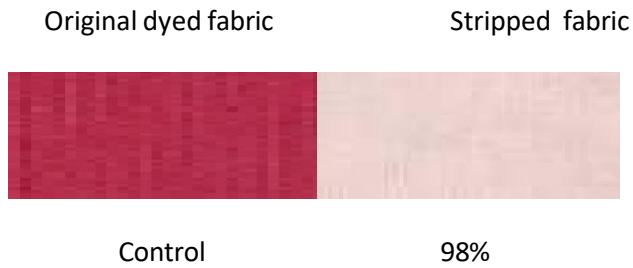

Cross staining on other components of blends in one bath dyeing :

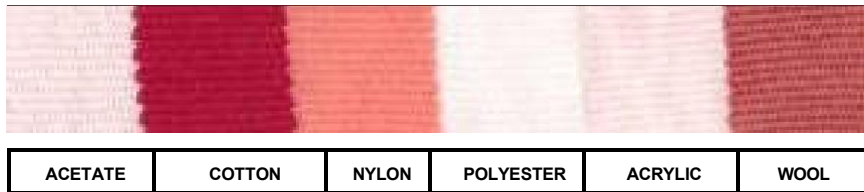

(This information provided is in good faith, to the best of our knowledge and without liabilities)