

## TECHNICAL INFORMATION

### SEGALEVEL SET

A high migration power leveling agent for nylon and wool.

- It regulates the pulling of nylon dyes and supports evenly dispersed the pulling of dye the same color tones.
- It increases penetration of the fabric PA dye and ability of built-up.
- It provides correct dyeing by arranging the draft in PA fibers which draws at a very low temperature.
- It is effective for removal of the incorrect dyeing.

### PROPERTIES

<b>Component</b>	Ethoxylated, based on the alcohol derivative mixture
<b>Appearance</b>	Yellowish liquid
<b>Ionic character</b>	Amphoteric.
<b>pH</b>	7.0–9.0
<b>Density</b>	1.03 g/cm <sup>3</sup>
<b>Foam</b>	Medium
<b>Solubility</b>	Can be diluted easily with cold and hot water

### APPLICATION

Segalevet SET Liq. can be added directly dye float. It should not be mixed directly with anionic products.

### Recommended Amounts



PA and WO dye bath

0.5 – 1.5 g/L Segalevel SET

PA and WO dye repair bath

1.0 – 3.0 g/L Segalevel SET

#### • MIGRATION IN PA

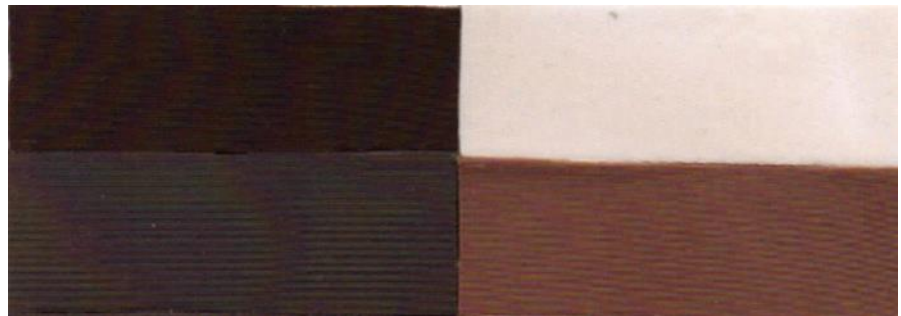

**Storage :** The storage life in original package at 0–40 °C is 12 months.

Paints, pigments, and most of the chemicals are patented by Sozal Ltd or its subsidiaries in various industrial countries. The information and recommendations presented here have been created with great care, but they may not include every possible situation. These information and recommendations are non-binding guidelines and must be adapted to the conditions in force. Moreover, no liability is accepted for the non-written application areas and methods. Information and protective measures that are required to be specified can be obtained from the Safety Data Sheet.